



Perko 0800 Series Solar-Ray® Searchlights

1


0800 Series 10", 12" or 14"

**Cast Bronze and Heavy Gauge Brass
Polished Chrome or White Perko•Kote Finish
12, 24, 32, 120 or 230 Volts**



The 0800 Series - Solar-Ray® Searchlights are available in 10", 12" and 14" sizes with your choice of Deck, Wheel, Lever/Gear Controls or DEC on 14 inch model. All models feature: halo deflectors, parabolic glass mirror reflectors for maximum light output and ventilation covers for quick dissipation of heat to help prolong bulb life. Hinged front doors have quick release stainless steel latches to provide easy access for bulb replacement. The 0800 Series models are also available in our white PERKO•KOTE finish, an advanced powder coating process that eliminates the need for painting while providing a scratch resistant and chip-proof surface for painting when necessary to match the color of the vessel.

Bulbs are not included and must be ordered separately. PERKO offers a choice of the traditional incandescent or the brighter, more piercing quartz-halogen bulbs in a variety of voltages and wattages to fit every need. For complete information on bulbs and candlepower output, See pages 63 & 64.

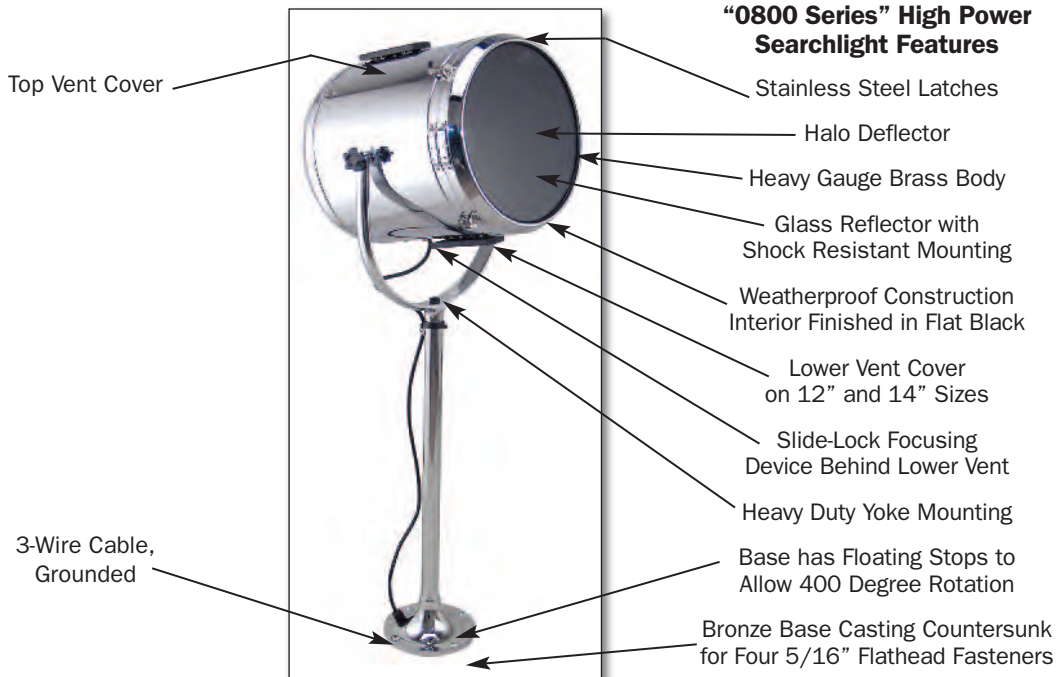

BULBS ARE NOT INCLUDED IN LIGHTS.

CONTROL TYPES

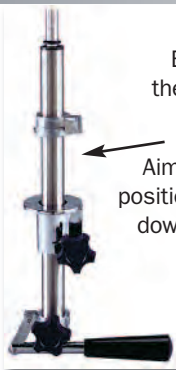


Fig. 0851

DECK CONTROL

Equipped with handles on the rear cover for positioning.

LEVER CONTROL

Aim handle for horizontal position. Move handle up and down for vertical position.



Fig. 0852

WHEEL CONTROL

Turn upper wheel for horizontal position. Turn lower wheel for vertical position.

LEVER/GEAR CONTROL

Aim handle for horizontal position. Twist handle for vertical position.

DISTANT ELECTRIC CONTROL

Joystick type controller for both horizontal & vertical positioning (Only Available on the 0887)



Fig. 0969



1074 Kenran Industrial Dr.
St. Louis, MO 63137
Phone: 1-800-381-9968

Perko 0887 Series Distant Electric Control Solar-Ray® Searchlight



0887 Series for 12, 24 & 120 Volt



Lamp
Incandescent

1

TECH INFO		
Nominal Drum Diameter	Length Drum	Gross Shipping Weight
Inches	Inches	Pounds
14	17	68



Distant Electric Control

Joystick type controller with variable speed control for both horizontal & vertical positioning



Fig. 0887 - Standard Pedestal With DEC Base

All Aluminum - White Perko•Kote Finish

ORDERING INFO	
Description	Catalog No.
Searchlight Head Assembly w/ Distant Electric Control Base - 12 Volt	0887EA3WHT
Searchlight Head Assembly w/ Distant Electric Control Base - 24 Volt	0887EB3WHT
Searchlight Head Assembly w/ Distant Electric Control Base - 120 Volt	0887EC3WHT

Bulbs Are Not Included in Lights (See Pages 63 & 64).



1074 Kenran Industrial Dr.
St. Louis, MO 63137
Phone: 1-800-381-9968

HUMCO LIGHTS

Perko 0883 Series Deck Control Solar-Ray® Searchlights

1



0883 Series Deck Control Solar-Ray® Searchlights 10", 12" or 14"

TECH INFO		
"A" Nominal Drum Diameter	"C" Length Drum	Approx. Ship Weight
Inches	Inches	Pounds
10	13	28
12	15	38
14	17	45

Lamp



Incandescent



Fig. 0883 - Standard Pedestal Chrome



Fig. 0883 - High Pedestal Chrome



Fig. 0883 - Medium Pedestal White

- A - Nominal drum diameter
- C - Drum length
- J - Overall height from mounting surface to top of searchlight

Bulbs Are Not Included in Lights (See Pages 63 & 64).



1074 Kenran Industrial Dr.
 St. Louis, MO 63137
 Phone: 1-800-381-9968

Perko 0883 Series Deck Control Solar-Ray® Searchlights

0883 Series Deck Control Solar-Ray® Searchlights

10", 12" or 14"

Ordering Info

1

- NOTES: 1) These Searchlights Cannot Be Fitted With Controls.
 2) Bulbs Must be Ordered Separately, Refer to Pages 63 and 64 for Ordering Information.
 3) Refer to Worksheet on Page 62 For Help in Bulb Ordering.

ORDERING INFO - STANDARD PEDESTAL			
Nominal Reflector Size Inches	"J" Height Overall Inches	Polished Chrome Catalog No.	White PERKO•KOTE Catalog No.
10	20-1/8	08830P1CHR	08830P1WHT
12	22-1/8	08830P2CHR	08830P2WHT
14	25-1/8	08830P3CHR	08830P3WHT

Standard Pedestal Base Diameter, 7 Inches

ORDERING INFO - MEDIUM PEDESTAL			
Nominal Reflector Size Inches	"J" Height Overall Inches	Polished Chrome Catalog No.	White PERKO•KOTE Catalog No.
10	27-1/2	0883MP1CHR	0883MP1WHT
12	29-1/2	0883MP2CHR	0883MP2WHT
14	32-1/2	0883MP3CHR	0883MP3WHT

Medium Pedestal Base Diameter, 8 Inches

ORDERING INFO - HIGH PEDESTAL			
Nominal Reflector Size Inches	"J" Height Overall Inches	Polished Chrome Catalog No.	White PERKO•KOTE Catalog No.
10	44	0883HP1CHR	0883HP1WHT
12	46	0883HP2CHR	0883HP2WHT
14	49	0883HP3CHR	0883HP3WHT

High Pedestal Base Diameter, 8 Inches

**NOTE: Custom Pedestal Heights are Available.
 Price Upon Application.
 Specify the "J" Dimension for Custom Pedestal Height.**





1074 Kenran Industrial Dr.
St. Louis, MO 63137
Phone: 1-800-381-9968

HUMCO LIGHTS

Perko 0884 Series Lever Control Solar-Ray® Searchlights

0884 Series Lever Control Solar-Ray® Searchlights

10", 12" and 14"



TECH INFO		
"A" Nominal Drum Diameter Inches	"C" Length Drum Inches	Approx. Ship Weight Pounds
10	13	28
12	15	38
14	17	45



**Fig. 0884
Standard Pedestal
Chrome**



**Fig. 0884
Medium Pedestal
Chrome**



**Fig. 0884
High Pedestal
White**

- A - Nominal drum diameter
- C - Drum length
- J - Overall height from mounting surface to top of searchlight
- E - Control length

Bulbs Are Not Included in Lights (See Page 63 & 64).



Perko 0884 Series Lever Control Solar-Ray® Searchlight Head Assemblies

0884 Series Lever Control Solar-Ray® Searchlights 10", 12" and 14" Ordering Info

1

- Notes: 1) Bulbs Must be Ordered Separately, Refer to Pages 63 and 64 for Ordering Information.
2) Refer to Worksheet on Page 62 For Help in Bulb Ordering.

ORDERING INFO - STANDARD PEDESTAL HEAD ASSEMBLIES

Nominal Reflector Size Inches	"J" Height Inches	Polished Chrome Catalog No.	White PERKO•KOTE Catalog No.
10	20-1/8	08840P1CHR	08840P1WHT
12	22-1/8	08840P2CHR	08840P2WHT
14	25-1/8	08840P3CHR	08840P3WHT

Standard Pedestal Base Diameter, 7 Inches

ORDERING INFO - MEDIUM PEDESTAL HEAD ASSEMBLIES

Nominal Reflector Size Inches	"J" Height Inches	Polished Chrome Catalog No.	White PERKO•KOTE Catalog No.
10	28-1/4	0884MP1CHR	0884MP1WHT
12	30-1/4	0884MP2CHR	0884MP2WHT
14	33-1/4	0884MP3CHR	0884MP3WHT

Medium Pedestal Base Diameter, 8 Inches

ORDERING INFO - HIGH PEDESTAL HEAD ASSEMBLIES

Nominal Reflector Size Inches	"J" Height Inches	Polished Chrome Catalog No.	White PERKO•KOTE Catalog No.
10	44-3/4	0884HP1CHR	0884HP1WHT
12	46-3/4	0884HP2CHR	0884HP2WHT
14	49-3/4	0884HP3CHR	0884HP3WHT

High Pedestal Base Diameter, 8 Inches

High Pedestal White



High Pedestal Chrome



Med. Pedestal White



Std. Pedestal White



Std. Pedestal Chrome



Med. Pedestal Chrome



NOTE: Custom Pedestal Heights are Available. Price Upon Application. Specify the "J" Dimension for Custom Pedestal Height.

Fig. 0851 - Lever Control Assemblies

Control assemblies of different lengths may be interchanged on Solar-Ray® searchlights (Fig. 0884) of the same pedestal height. The following chart makes it possible to order and stock different lengths of these assemblies separately to offer a large variety of Solar-Ray® searchlights with a minimum of inventory. Custom Control Lengths are Available. Price Upon Application. Specify the "E" Dimension for Custom Control Lengths.

ORDERING INFO

"E" Length Control Inches	O For Standard Pedestal	M For Medium Pedestal	H For High Pedestal Cat. No.	Approx. Ship Weight Lbs. O/M/H
8-1/2	0851000*	0851M00*	0851H00*	3.4/4.3/6.1
15-1/2	08510A0	0851MA0	0851HA0	4.1/4.9/6.3
22-1/2	08510B0	0851MB0	0851HB0	5.0/5.8/6.9
29-1/2	08510C0	0851MC0	0851HC0	5.8/6.6/8.5

* Maximum Ceiling Thickness, 4-1/2 Inches



1074 Kenran Industrial Dr.
St. Louis, MO 63137
Phone: 1-800-381-9968

HUMCO LIGHTS

Perko 0885 Series Wheel or Lever/Gear Control Solar-Ray® Searchlights

1

0885 Series Wheel or Lever/Gear Control Solar-Ray® Searchlights



10", 12" and 14"

TECH INFO		
"A" Nominal Drum Diameter Inches	"C" Length Drum Inches	Nominal Weight Pounds
10	13	28
12	15	38
14	17	45



**Fig. 0885 White
Standard Pedestal
Shown With Wheel Control**



**Fig. 0885 Chrome
Medium Pedestal
Shown With
Lever/Gear Control**



**Fig. 0885 Chrome
High Pedestal
Shown With Wheel Control**

- A - Nominal drum diameter
- C - Drum length
- E - Control length (lever/gear control)
- F - Control length (wheel control)
- G - Distance between wheels, 2 inches.
- J - Overall height from mounting surface to top of searchlight

Bulbs Are Not Included in Lights (See Pages 63 & 64).



1074 Kenran Industrial Dr.
St. Louis, MO 63137
Phone: 1-800-381-9968

HUMCO LIGHTS

Perko 0885 Series Wheel or Lever/Gear Control Solar-Ray® Searchlight Head Assemblies

0885 Series Wheel or Lever/Gear Control Solar-Ray® Searchlights 10", 12" and 14" Ordering Info

1

- Notes: 1) Bulbs Must be Ordered Separately, Refer to Pages 63 and 64 for Ordering Information.
2) Refer to Worksheet on Page 62 For Help in Bulb Ordering.

ORDERING INFO - STANDARD PEDESTAL HEAD ASSEMBLIES			
Nominal Reflector Size Inches	"J" Height Inches	Polished Chrome Catalog No.	White PERKO•KOTE Catalog No.
10	20-1/8	08850P1CHR	08850P1WHT
12	22-1/8	08850P2CHR	08850P2WHT
14	25-1/8	08850P3CHR	08850P3WHT

Standard Pedestal Base Diameter, 7 Inches

ORDERING INFO - MEDIUM PEDESTAL HEAD ASSEMBLIES			
Nominal Reflector Size Inches	"J" Height Inches	Polished Chrome Catalog No.	White PERKO•KOTE Catalog No.
10	28-1/4	0885MP1CHR	0885MP1WHT
12	30-1/4	0885MP2CHR	0885MP2WHT
14	33-1/4	0885MP3CHR	0885MP3WHT

Medium Pedestal Base Diameter, 8 Inches

ORDERING INFO - HIGH PEDESTAL HEAD ASSEMBLIES			
Nominal Reflector Size Inches	"J" Height Inches	Polished Chrome Catalog No.	White PERKO•KOTE Catalog No.
10	44-3/4	0885HP1CHR	0885HP1WHT
12	46-3/4	0885HP2CHR	0885HP2WHT
14	49-3/4	0885HP3CHR	0885HP3WHT

High Pedestal Base Diameter, 8 Inches



NOTE: Custom Pedestal Heights are Available. Price Upon Application. Specify the "J" Dimension for Custom Pedestal Height.

Control Assemblies - Figs. 0852 & 0969

Control assemblies of different lengths may be interchanged on Solar-Ray® searchlights (Fig. 0885) of the same pedestal height. The following chart makes it possible to order and stock different lengths of these assemblies separately to offer a large variety of Solar-Ray® Searchlights with a minimum of inventory.

ORDERING INFO WHEEL CONTROL - FIG. 0852					ORDERING INFO LEVER/GEAR CONTROL - FIG. 0969				
"F" Length Control Inches	O For Standard Pedestal	M For Medium Pedestal	H For High Pedestal	Nominal Wt. Lbs. O/M/H	"E" Length Control Inches	O For Standard Pedestal	M For Medium Pedestal	H For High Pedestal	Nominal Wt. Lbs. O/M/H
7-1/2	0852000*	0852M00*	0852H00*	4.1/5.0/7.0	8-1/2	0969000*	0969M00*	0969H00*	5.2/6.1/7.8
14-1/2	08520A0	0852MA0	0852HA0	4.9/5.7/7.6	15-1/2	09690A0	0969MA0	0969HA0	6.0/6.6/8.5
21-1/2	08520B0	0852MB0	0852HB0	5.8/6.5/8.5	22-1/2	09690B0	0969MB0	0969HB0	6.9/7.6/9.4
28-1/2	08520C0	0852MC0	0852HC0	6.5/7.3/9.2	29-1/2	09690C0	0969MC0	0969HC0	7.6/8.3/10.2

*Maximum Ceiling Thickness, 3 Inches

*Maximum Ceiling Thickness, 3-1/2 Inches

NOTE: Custom Control Lengths are Available. Price Upon Application. Specify the "E" or "F" Dimension for Custom Control Lengths.



Perko 0800 Series Solar-Ray® Searchlight Ordering Worksheet

1

0800 Series

- 1) **Head Assembly Type:** _____ }
 - a) For deck control - 0883
 - b) For lever control - 0884
 - c) For wheel and lever/gear control - 0885
- 2) **Pedestal (overall) Height (see catalog page for details):** _____ }
 - a) Standard - 0
 - b) Medium - M
 - c) High - H

For custom pedestal height see no. 10 below.
- 3) **Reflector Size:** _____ }
 - a) 10 inch - 1
 - b) 12 inch - 2
 - c) 14 inch - 3
- 4) **Finish:** _____ }
 - a) PERKOPLATE (polished chrome) - CHR
 - b) PERKO•KOTE (white) - WHT
- 5) **Control Type:** _____ }
 - a) Lever control (For 0884 Head Assembly) - 0851
 - b) Wheel control (For 0885 Head Assembly) - 0852
 - c) Lever/Gear control (For 0885 Head Assembly) - 0969
- 6) **Control Length (when necessary):** _____ }
 - a) (8-1/2" for 0851 & 0969) or (7-1/2" for 0852) - 0
 - b) (15-1/2" for 0851 & 0969) or (14-1/2" for 0852) - A
 - c) (22-1/2" for 0851 & 0969) or (21-1/2" for 0852) - B
 - d) (29-1/2" for 0851 & 0969) or (28-1/2" for 0852) - C
- 7) **Bulb Number (see pages 63 & 64 for details):** _____ }

Bulb Cat. No. _____
- 8) **Socket Type:**Code: _____ }
 - a) Medium Screw "B"
 - b) Medium Prefocus..... "E"
 - c) Mogul Screw..... "D" (Not for use with 10 inch reflector.)
 - d) 2-Pin Prefocus (12 volt) "F"
 - e) 2-Pin Prefocus (24 volt) "G"
 - f) 2-Pin Prefocus (32 volt) "H"
 - g) 2-Pin Prefocus (600 Watt) "I"
 - h) 2-Pin Prefocus (900 watt) "K"

Socket Code _____
- 9) **Custom control length:** _____
Specify control length desired as measured from pedestal base to lower end of control assembly ("E" or "F" dimension).
- 10) **Custom pedestal height:** _____
Specify overall height of searchlight desired as measured from the top of the searchlight head to the bottom of the pedestal base ("J" dimension).

Spare Parts Ordering Info for 0800 Series Solar-Ray® Searchlights						
Fig.	Size	Front Glass Cat. No.	Front Door with Glass Cat. No. *	Rear Cover Cat. No. *	Reflector** Cat. No.	Pinion Gear Cat. No.
0883	10"	0889001CLR	0891001CHR	0908001CHR	0890001	—
	12"	0889002CLR	0891002CHR	0908002CHR	0890002	—
	14"	0889003CLR	0891003CHR	0908003CHR	0890003	—
0884	10"	0889001CLR	0891001CHR	0902001CHR	0890001	—
	12"	0889002CLR	0891002CHR	0902002CHR	0890002	—
	14"	0889003CLR	0891003CHR	0902003CHR	0890003	—
0885	10"	0889001CLR	0891001CHR	0902001CHR	0890001	0905
	12"	0889002CLR	0891002CHR	0902002CHR	0890002	0905
	14"	0889003CLR	0891003CHR	0902003CHR	0890003	0905

* NOTE: The Spare Part catalog numbers listed above are for the polished chrome (CHR) finish.

To order white finish, replace the "CHR" in the catalog number with the "WHT" finish code.

**Replacement Retaining Clips (Cat. No. 0910) For The Reflector Should Also Be Ordered When Ordering a Replacement Reflector To Assure a Proper Fit.



1074 Kenran Industrial Dr.
St. Louis, MO 63137
Phone: 1-800-381-9968

HUMCO LIGHTS

Perko 0800 Series Bulb Technical Data for Solar-Ray® Searchlights

0800 Series Bulbs

The Following Chart is Provided to Aid in Proper Bulb Selection:

1

Searchlight Size Inches	Approximate Range Miles*	Bulb Catalog Number	Bulb Wattage	Rated Life Hours**	Maximum Candlepower Output	Horizontal Beam Spread Degrees	Vertical Beam Spread Degrees	
10"	12	1	0816	100	50	1,168,000	1.7	1.4
	24	1	0836	150	50	891,000	2.6	1.5
	32	3/4	0817	200	200	571,000	2.6	1.7
	32	1	0806	500	50	943,000	3.4	3.9
	120	1	0820	600	75	908,000	4.4	2.2
	120	1-1/8	0807	500	25	1,332,000	3.5	2.8
	120	1-1/8	0844	500	500	1,260,000	3.1	3.4
	12"	12	1-1/4	0816	100	50	1,617,000	1.5
24		1-1/8	0836	150	50	1,349,000	2.2	1.5
32		7/8	0817	200	200	865,000	2.4	1.6
32		1-1/8	0806	500	50	1,496,000	3.4	3.5
120		1	0837	750	200	977,000	4.1	3.7
120		1	0845	750	200	1,185,000	3.7	5.2
120		1-1/8	0820	600	75	1,410,000	4.3	1.9
120		1-1/4	0809	750	25	1,792,000	3.6	3.4
120		1-1/4	0844	500	500	1,641,000	3.2	3.4
120		1-1/4	0807	500	25	1,799,000	3.3	3.1
120		1-1/4	0811	1000	50	1,816,000	4.0	4.9
120		1-3/8	0810	1000	25	1,894,000	4.0	3.8
120		1-3/8	0846	1000	200	1,911,000	3.9	5.0
120		1-1/2	0839	900	75	2,482,000	4.5	5.5
230		7/8	0860	1000	950	865,000	6.9	5.9
14"		12	1-1/4	0816	100	50	1,756,000	1.5
	24	1-1/8	0836	150	50	1,367,000	2.3	1.2
	32	1	0817	200	200	943,000	2.2	1.5
	32	1-1/8	0806	500	50	1,591,000	4.0	3.7
	120	1-1/8	0837	750	200	1,254,000	3.9	4.5
	120	1-1/8	0845	750	200	1,531,000	3.6	5.1
	120	1-1/4	0820	600	75	1,626,000	4.5	1.9
	120	1-3/8	0844	500	500	1,840,000	2.9	3.2
	120	1-3/8	0811	1000	50	2,249,000	4.0	5.1
	120	1-1/2	0807	500	25	2,353,000	3.2	3.2
	120	1-1/2	0809	750	25	2,422,000	3.7	4.0
	120	1-1/2	0846	1000	200	2,586,000	3.8	5.0
	120	1-1/2	0810	1000	25	2,621,000	4.0	4.5
	120	1-5/8	0839	900	75	2,889,000	4.5	5.2
	230	1	0860	1000	950	1,021,000	7.7	6.2

*The approximate ranges listed above are based on photometric measurements of beam candlepower output under ideal conditions. Many factors such as atmospheric conditions, size and color of target, background, etc., may reduce effective range considerably; therefore, these figures are offered only as a guide to compare different bulb and voltage options.

**NOTE: These are the "Rated Average Laboratory Life in Hours" of the Bulb Manufacturer obtained in closely controlled laboratory life testing of groups of lamps at their design voltage. It is not necessarily the same as the service life where conditions such as shock, vibration, voltage fluctuation and environment may result in a shorter average attained life.



2-PIN PREFOCUS



MOGUL SCREW



MEDIUM PREFOCUS



MEDIUM SCREW



Perko 0800 Series Bulb and Socket Ordering Information for Solar-Ray® Searchlights

1

0800 Series Bulbs

Bulbs Are Not Included in Lights and Must Be Ordered Separately.

For best results, the bulb and reflector must be perfectly compatible; therefore, be sure to specify the catalog number of the bulb desired. Peak candlepower is exceedingly sensitive to many factors, (i.e., a light source out of focus by 1/32 inch, under-voltage of only 4%, or differences between bulb manufacturers) which can cause a variation in range of up to 20%.

INCANDESCENT BULB ORDERING INFO							
Bulb Catalog Number	Voltage	Wattage	Socket Type	Socket Code Letter	For Searchlight Sizes Inches	Rated* Life Hours	Mfg. Bulb Code
0806	32	500	Medium Screw	B	10, 12, 14	50	DLT
0807	120	500	Medium Prefocus	E	10, 12, 14	25	CZX/DAB
0809	120	750	Medium Prefocus	E	12, 14	25	DDB
0837	120	750	Medium Prefocus	E	12, 14	200	DGH
0810	120	1000	Medium Prefocus	E	12, 14	25	DRS
0811	120	1000	Mogul Screw	D	12, 14	50	DPT

For a More Concentrated Beam, Longer Range, Brighter Light and a Longer Life, We Recommend the Following Bulbs:

"QUARTZ" TUNGSTEN-HALOGEN BULB ORDERING INFO							
Bulb Catalog Number	Voltage	Wattage	Socket Type	Socket Code Letter	For Searchlight Sizes Inches	Rated* Life Hours	Mfg. Bulb Code
0816	12	100	2-Pin Prefocus	F	10, 12, 14	50	FDT
0836	24	150	2-Pin Prefocus	G	10, 12, 14	50	DZE-FDS
0817	32	200	2-Pin Prefocus	H	10, 12, 14	200	1945
0844	120	500	Medium Prefocus	E	10, 12, 14	500	BTL
0820	120	600	2-Pin Prefocus	I	10, 12, 14	75	DYS
0845	120	750	Medium Prefocus	E	12, 14	200	BTP
0839	120	900	2-Pin Prefocus	K	12, 14	75	BVA
0846	120	1000	Medium Prefocus	E	12, 14	200	BTR
0860	230	1000	Medium Prefocus	E	12, 14	950	FKD

Please Order Carefully, Bulbs are Not Returnable.

*NOTE: These are the "Rated Average Laboratory Life in Hours" of the Bulb Manufacturer obtained in closely controlled laboratory life testing groups of lamps at their design voltage. It is not necessarily the same as the service life where conditions such as shock, vibration, voltage fluctuation and environment may result in a shorter average attained life.

Electric Socket and Support Stand Assemblies

Solar-Ray® Searchlights include a socket and support stand assembly based on the bulb or socket information given when ordering. The following chart makes it possible to order and stock different socket and stand assemblies for field conversion to meet a large variety of voltage and candlepower requirements with a minimum of inventory.

ORDERING INFO							
Socket Type (See Page 95 for Drawing)	Socket Code	For 10" Searchlights		For 12" Searchlights		For 14" Searchlights	
		Catalog Number	Height Stand Inches	Catalog Number	Height Stand Inches	Catalog Number	Height Stand Inches
Medium Screw	B	0872001	1-1/4	0872002	2-1/4	0872003	3-1/4
Medium Prefocus	E	0873001	1-5/16	0873002	1-15/16	0873003	2-15/16
Mogul Screw	D	—	—	0874002	7/16	0874003	1-1/4
2-Pin Prefocus (12 Volt)	F	0875001	3-1/2	0875002	4-1/2	0875003	5-1/2
2-Pin Prefocus (24 Volt)	G	0876001	3-1/4	0876002	4-1/4	0876003	5-1/4
2-Pin Prefocus (32 Volt)	H	0878001	3-1/4	0878002	4-1/4	0878003	5-1/4
2-Pin Prefocus (600 Watt)	I	0879001	3-1/8	0879002	4-1/8	0879003	5-1/8
2-Pin Prefocus (900 Watt)	K	—	—	0880002	3-13/16	0880003	4-13/16